

Case Sealer

Uniform Legend

Case Sealing for the Real World

This reliable case sealer for industrial environments seals a wide range of uniform cases.

Little David delivers packaging equipment that works for you



Tape cartridge tips back for easy tape threading



The Uniform offers:

- ☒ Low maintenance
- ☒ Safe UL listed
- ☒ Quick changeover
- ☒ Simple operation
- ☒ Interchangeable tape cartridges
- ☒ Heavy duty
- ☒ Reliable

The Uniform replaces:

- ☒ Expensive labor
- ☒ Hand taping boxes
- ☒ Unsafe machinery


Little David Uniform Legend



Uniform Legend

Dimensions:

Uniform Legend:

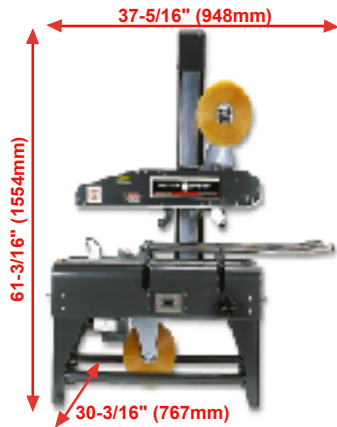

Additional Case Sealer Models:

Also Available LD-7:

- Semi-automatic case sealer
- Seals top and bottom of uniform box sizes



Also Available LD-3SB:

- Semi-automatic case sealer
- Seals top and bottom of uniform box sizes



Distributor Information:

Features of the Uniform Legend:

Reliable Performance - Warranty:

- 1 Year All Components*
- 2 Years Gear Reducer
- 3 Years Cartridge*

*Moving and wear parts are not included. Other restrictions may apply. Consult Loveshaw or your authorized Little David® Distributor for details

Flexible:

- Tapes boxes in a variety of sizes (see below)
- Can be ordered for 2" or 3" wide tape

Easy Operation:

- Plug in operation
- Minimal operator training required
- Sealed drive system
- CaseLocker ST® tape cartridge requires no lubrication

Safe:

- UL listed
- Patented single mast design allows clear access
- Knife guard system of the CaseLocker ST® tape cartridge only allows the blade to be exposed only when the rollers have been depressed

Specifications of the Uniform Legend:

Power Requirements:

- 115 - 220 volts, single phase, 60 cycle
(other voltage available, consult Loveshaw)

Operating Speed:

- Continuous belt drive; 80' per minute (24.4 m/min.)
(production rate depends on box size & operator dexterity)

Weight:

- 230 lbs. (104 kg) uncrated

Case Capacity: (with 2" wide CaseLocker ST® Cartridge)

- | | |
|------------------------|----------------------|
| ■ Minimum: | Maximum: |
| Height: 2-5/8" (64mm) | Height: 24" (610mm)* |
| Width: 4-1/2" (114mm) | Width: 22" (559mm) |
| Length: 4-1/2" (114mm) | Length: infinite |
- *High mast version accommodates box heights to 34" (864mm)
*Conveyor height minimum is 22-1/4" (565mm)

Options of the Uniform Legend:

- Casters
- Folder/Mailer
- Leg adjustments
- High mast for box heights to 34"
- Front and rear standard or roller pack table
- Top squeezer

LOVESHAW

Route 296, Box 83
South Canaan, PA 18459
Tel: (570) 937-4921 Fax: (570) 937-3229
(800) 572-3434

LOVESHAW Europe

Unit 9 Brunel Gate,
West Portway Industrial Estate
Andover, Hampshire England SP 10 3 SL
Tel: (1264) 357511 Fax: (1264) 355964



©Loveshaw, 2004